


FRB-757 Relay Specifications

Type	MR31-12 (NEC)
Contact rating	AC 600VA, DC 150W (non-reactive load)
Max switching current	5A (non-reactive load)
Max switching voltage	AC 250V, DC 30V (for DC voltage between 30 and 250V, max switching current must be limited to 50%, or 2.5A)
Min contact current	0.1A at 5V
Closure speed (make)	less than 15msec at standard coil voltage
Opening speed (break)	less than 10msec at standard coil voltage

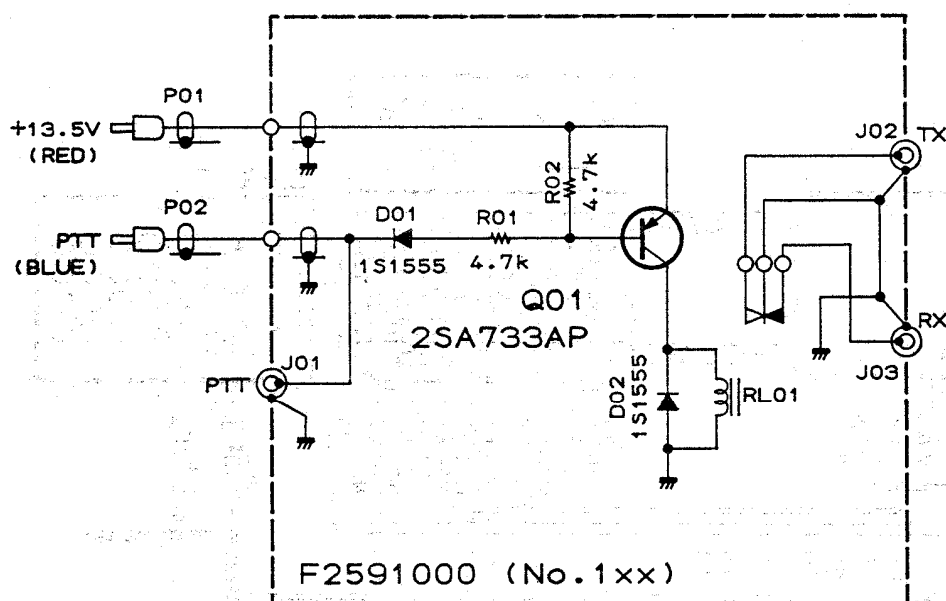

FRB-757
CIRCUIT DIAGRAM

Downloaded by ☐
☐
Amateur Radio Directory