



Downloaded by RadioAmateur.EU


MEASUREMENT CONDITIONS
 VOLTMETER: 10MQ/V
 DISPLAY FREQUENCY VHF: 145.000MHz
 UHF: 440.000MHz

- | | | | |
|-----|----------------|-------|-----------|
| C | COMMON | R | RX |
| VT | VHF-TX | VR | VHF-RX |
| VH | VHF-TX HI | UR | UHF-RX |
| VMH | VHF-TX MID HI | SQMAX | SQL-MAX |
| VML | VHF-TX MID LOW | SQMIN | SQL-MIN |
| VL | VHF-TX LOW | SQ ON | SQL-OPEN |
| UT | UHF-TX | SQ CS | SQL-CLOSE |
| UH | UHF-TX HI | FON | FAN-ON |
| UMH | UHF-TX MID HI | FOF | FAN-OFF |
| UML | UHF-TX MID LOW | VV | VHF-VCO |
| UL | UHF-TX LOW | UV | UHF-VCO |

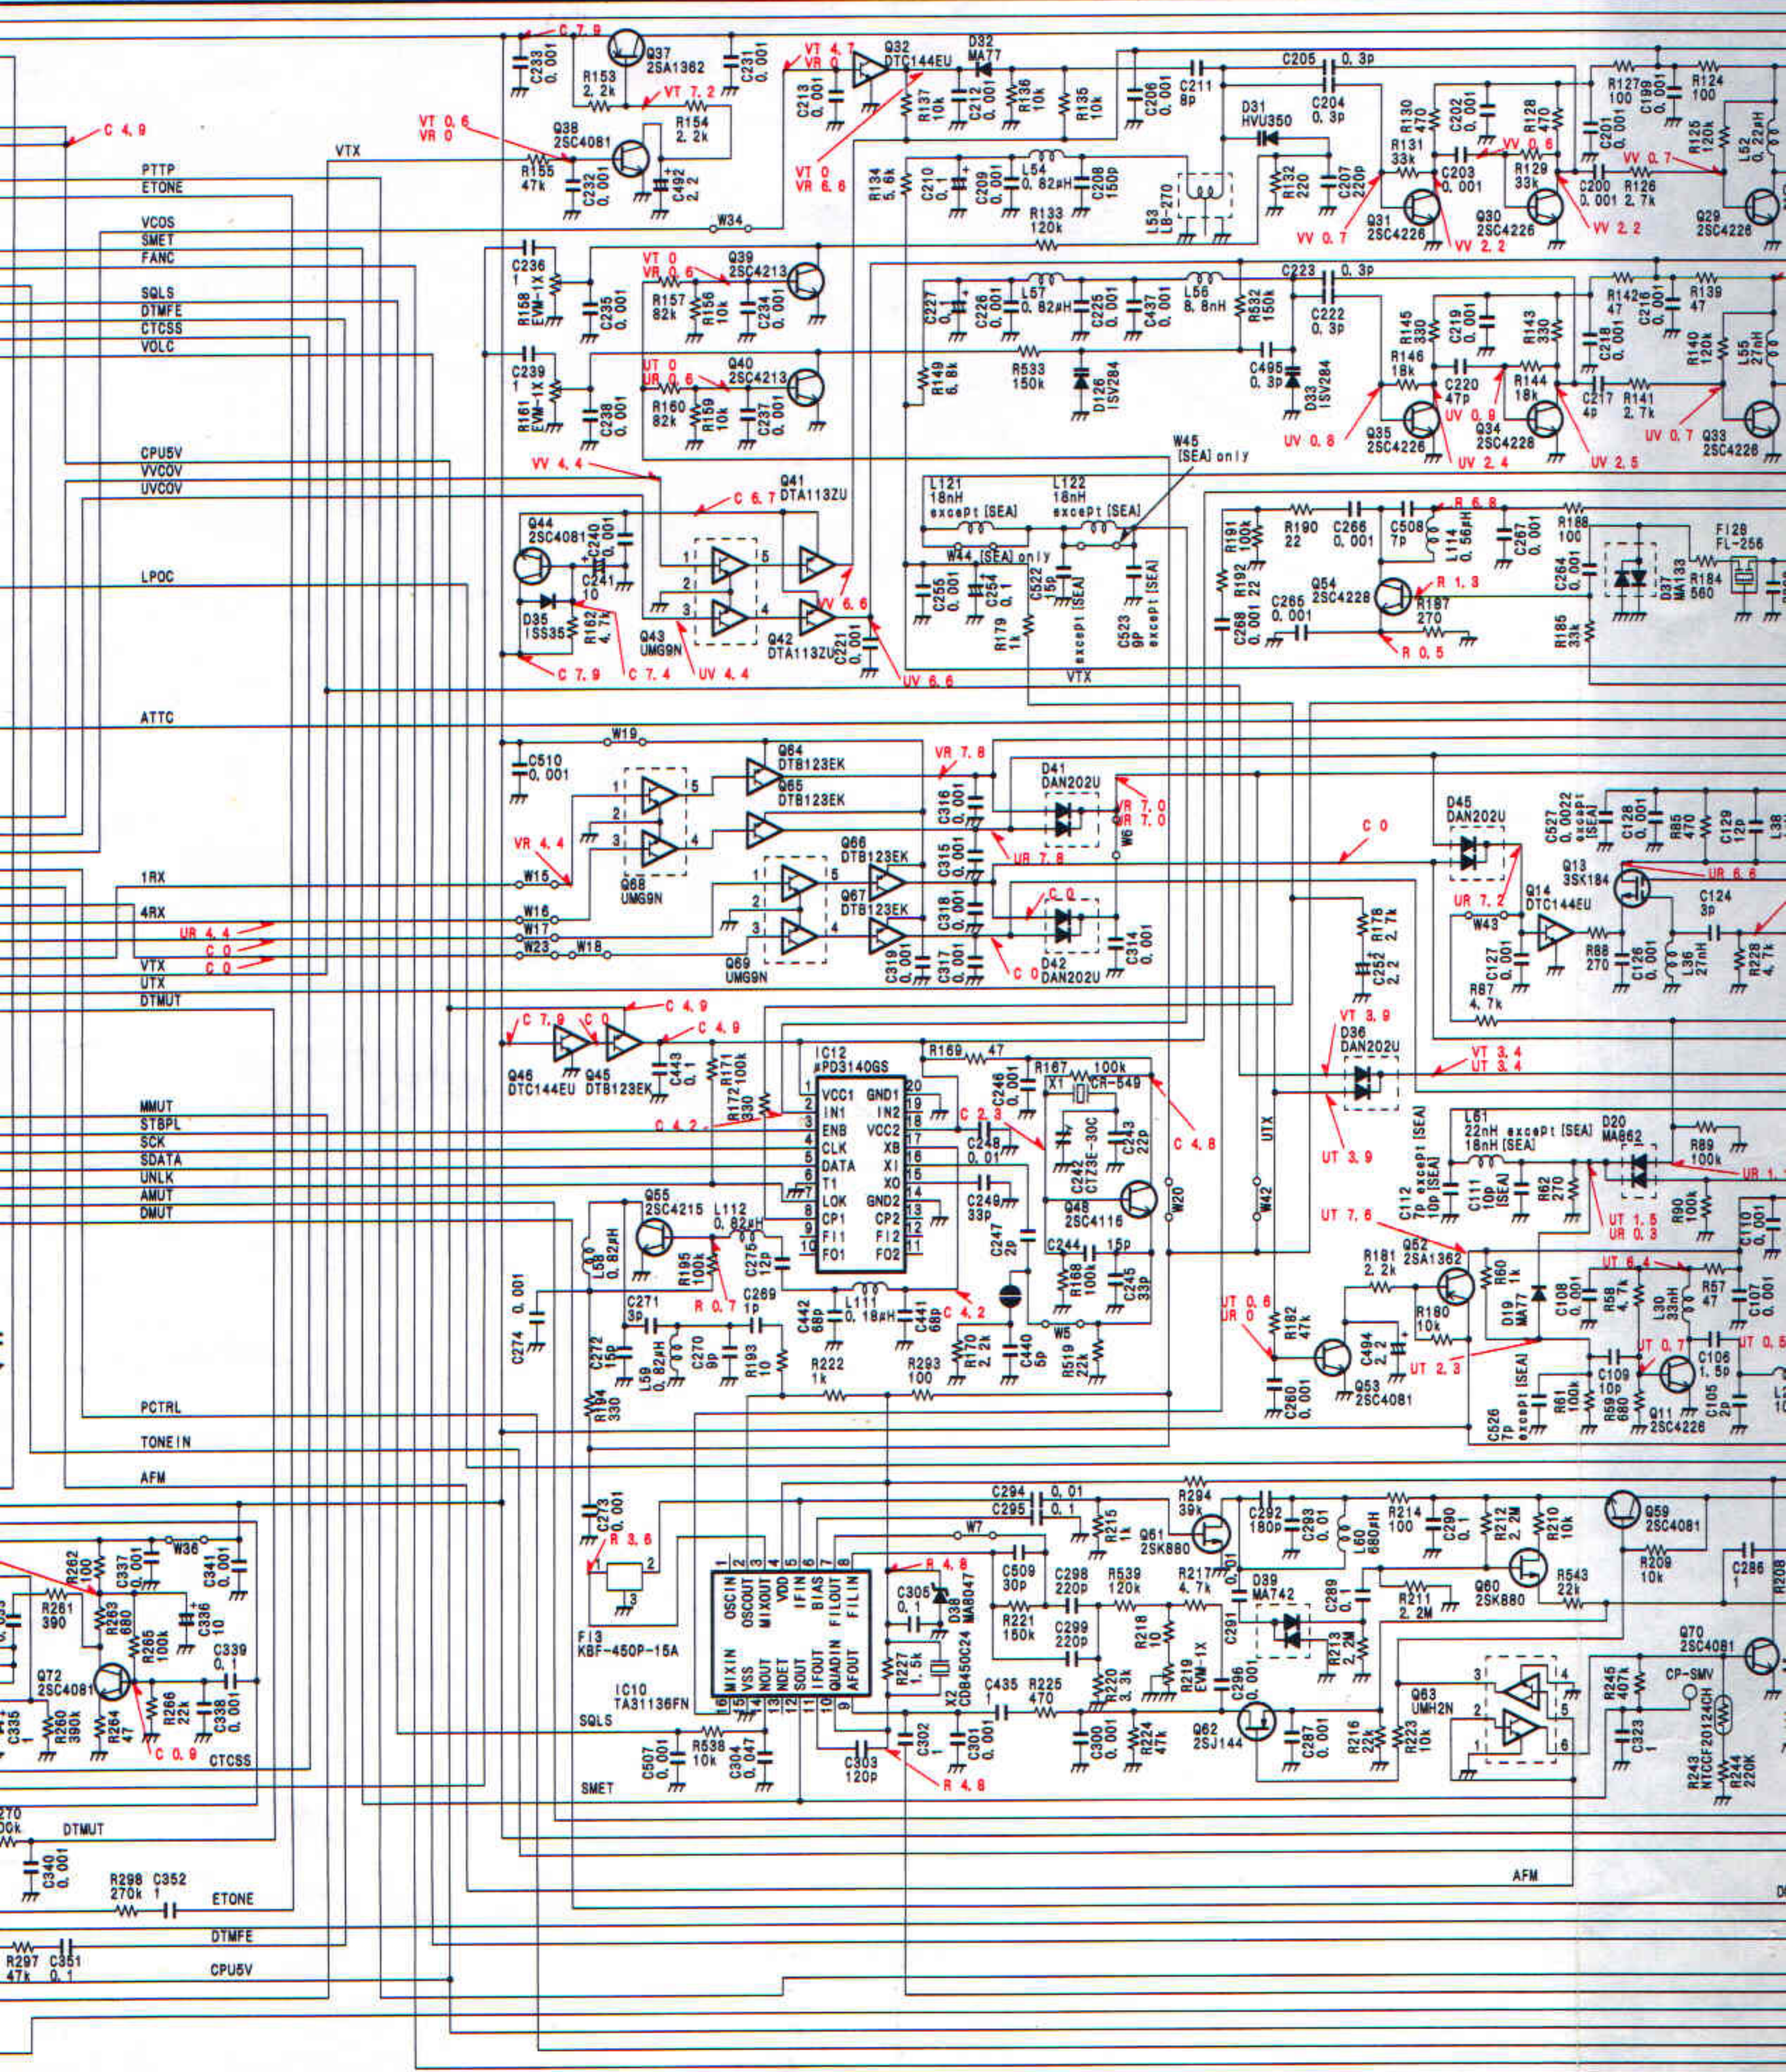


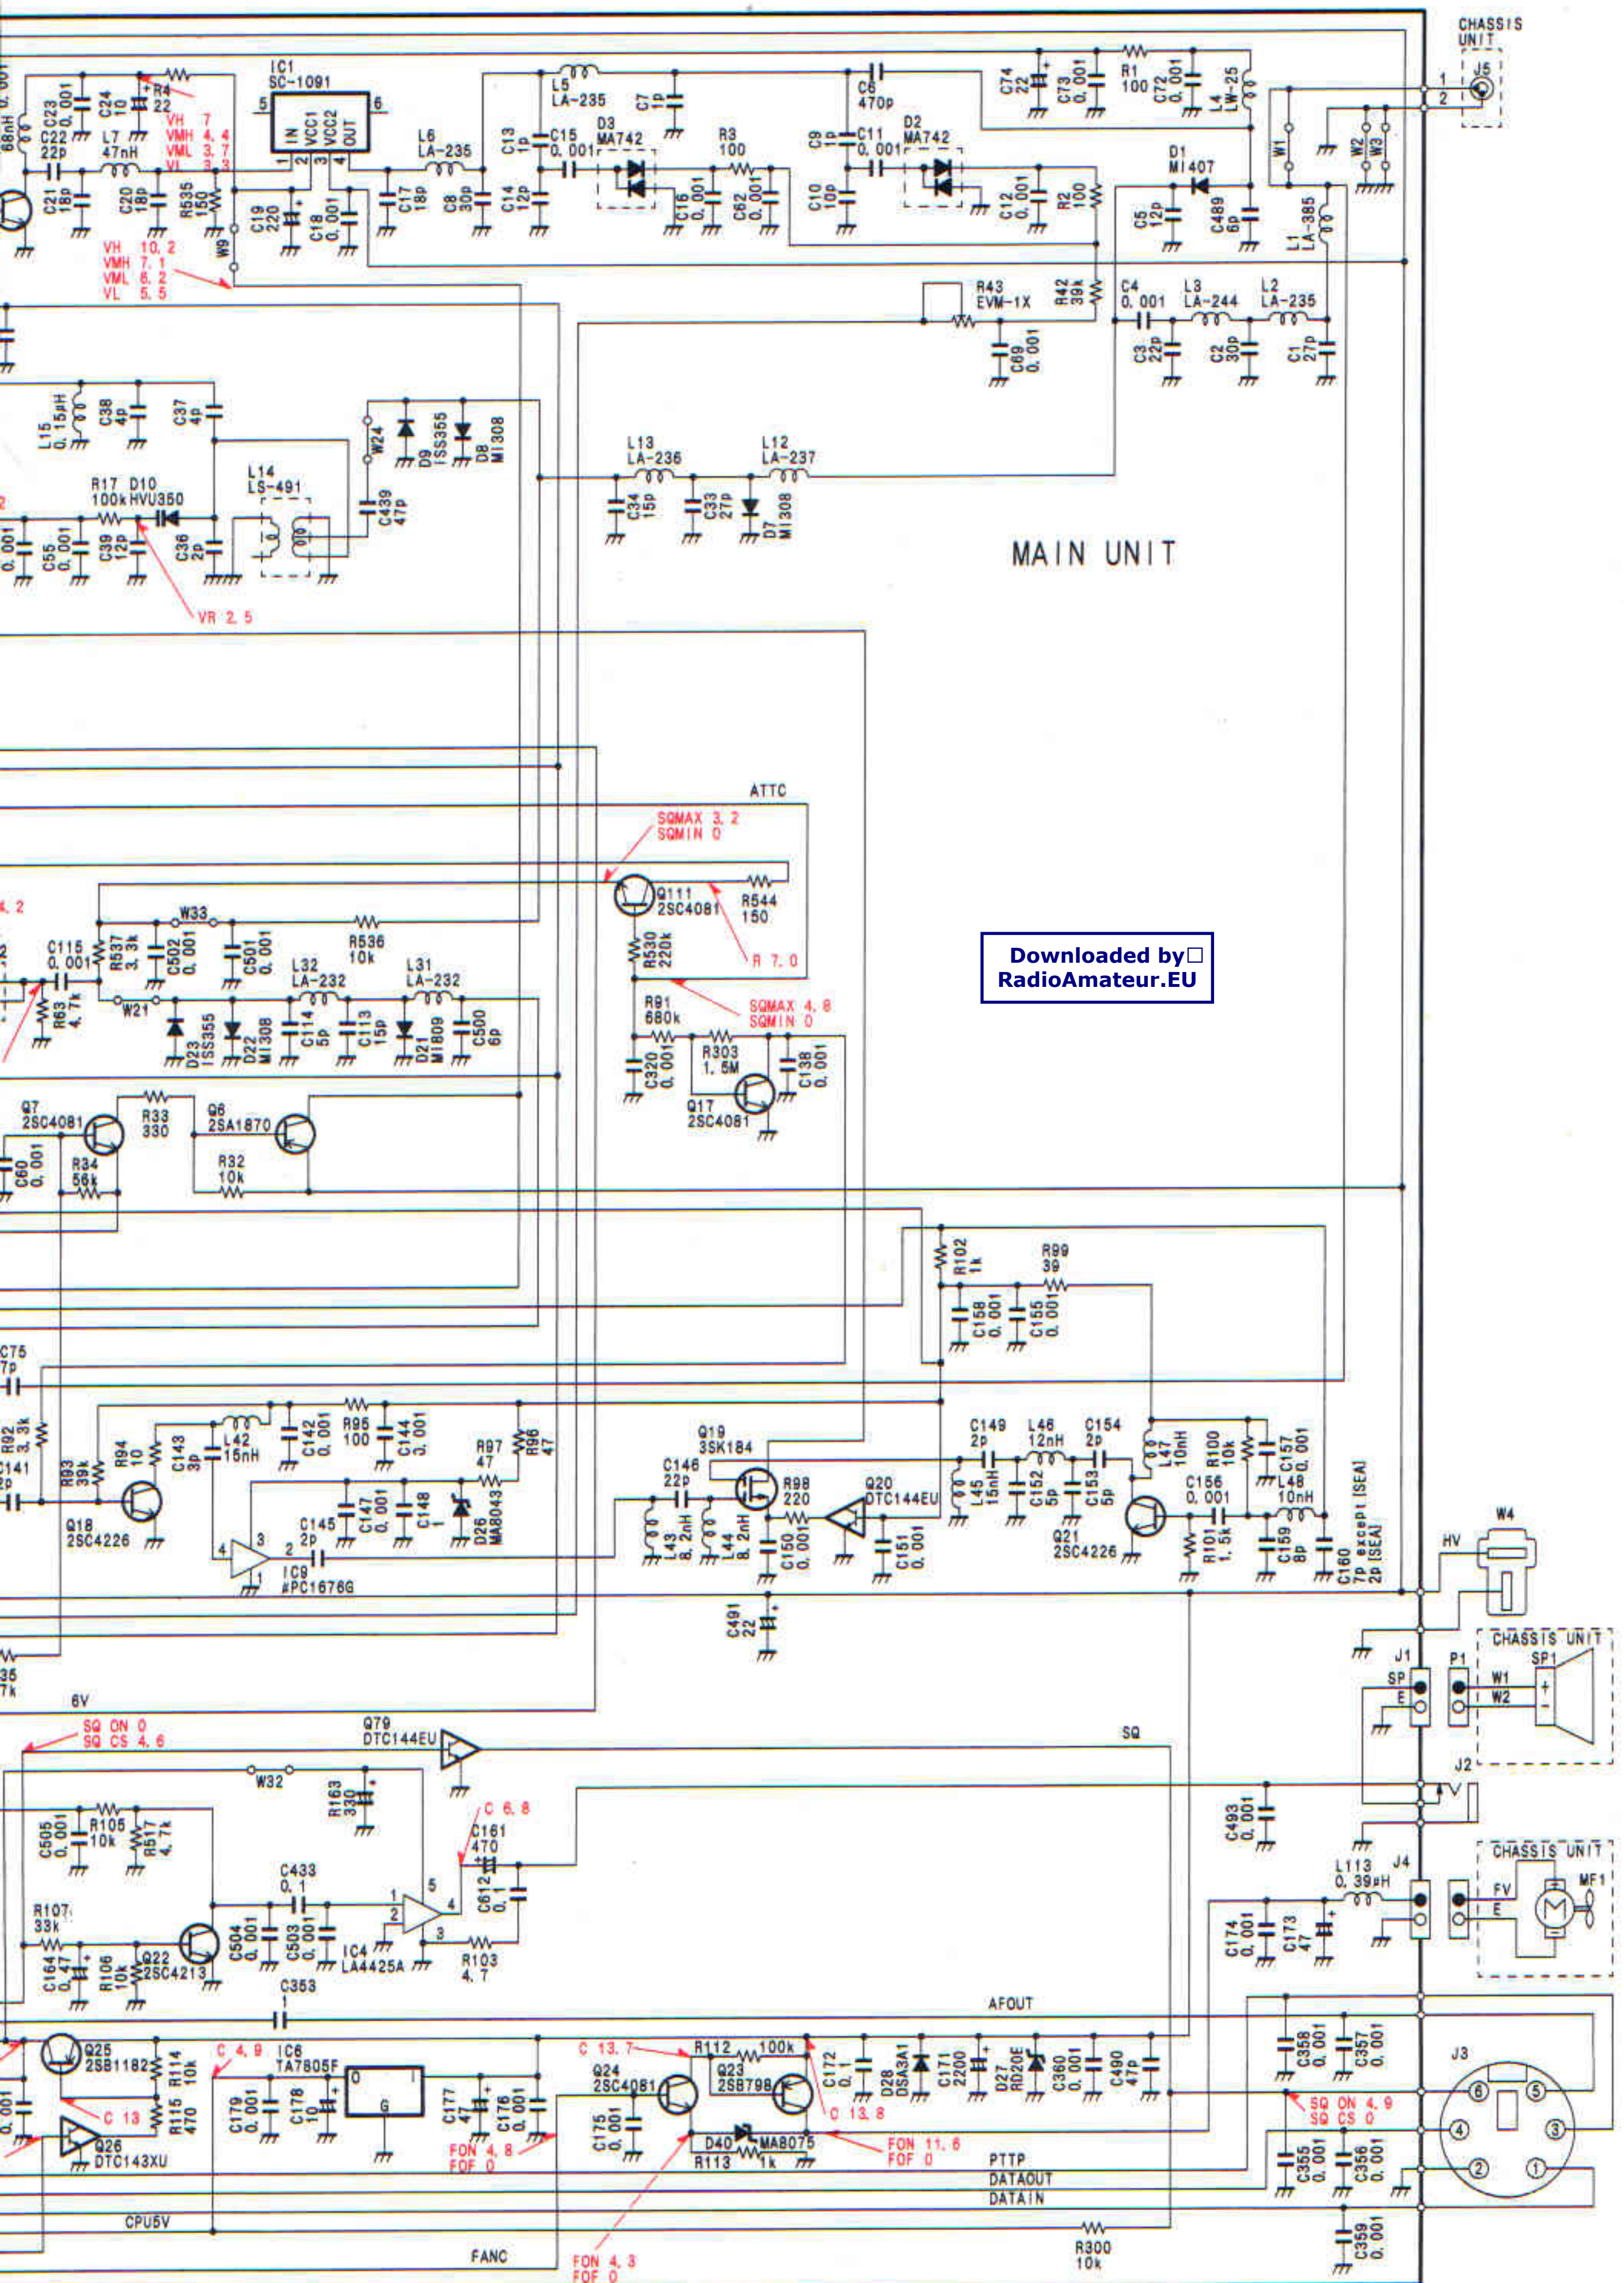

Downloaded by RadioAmateur.EU

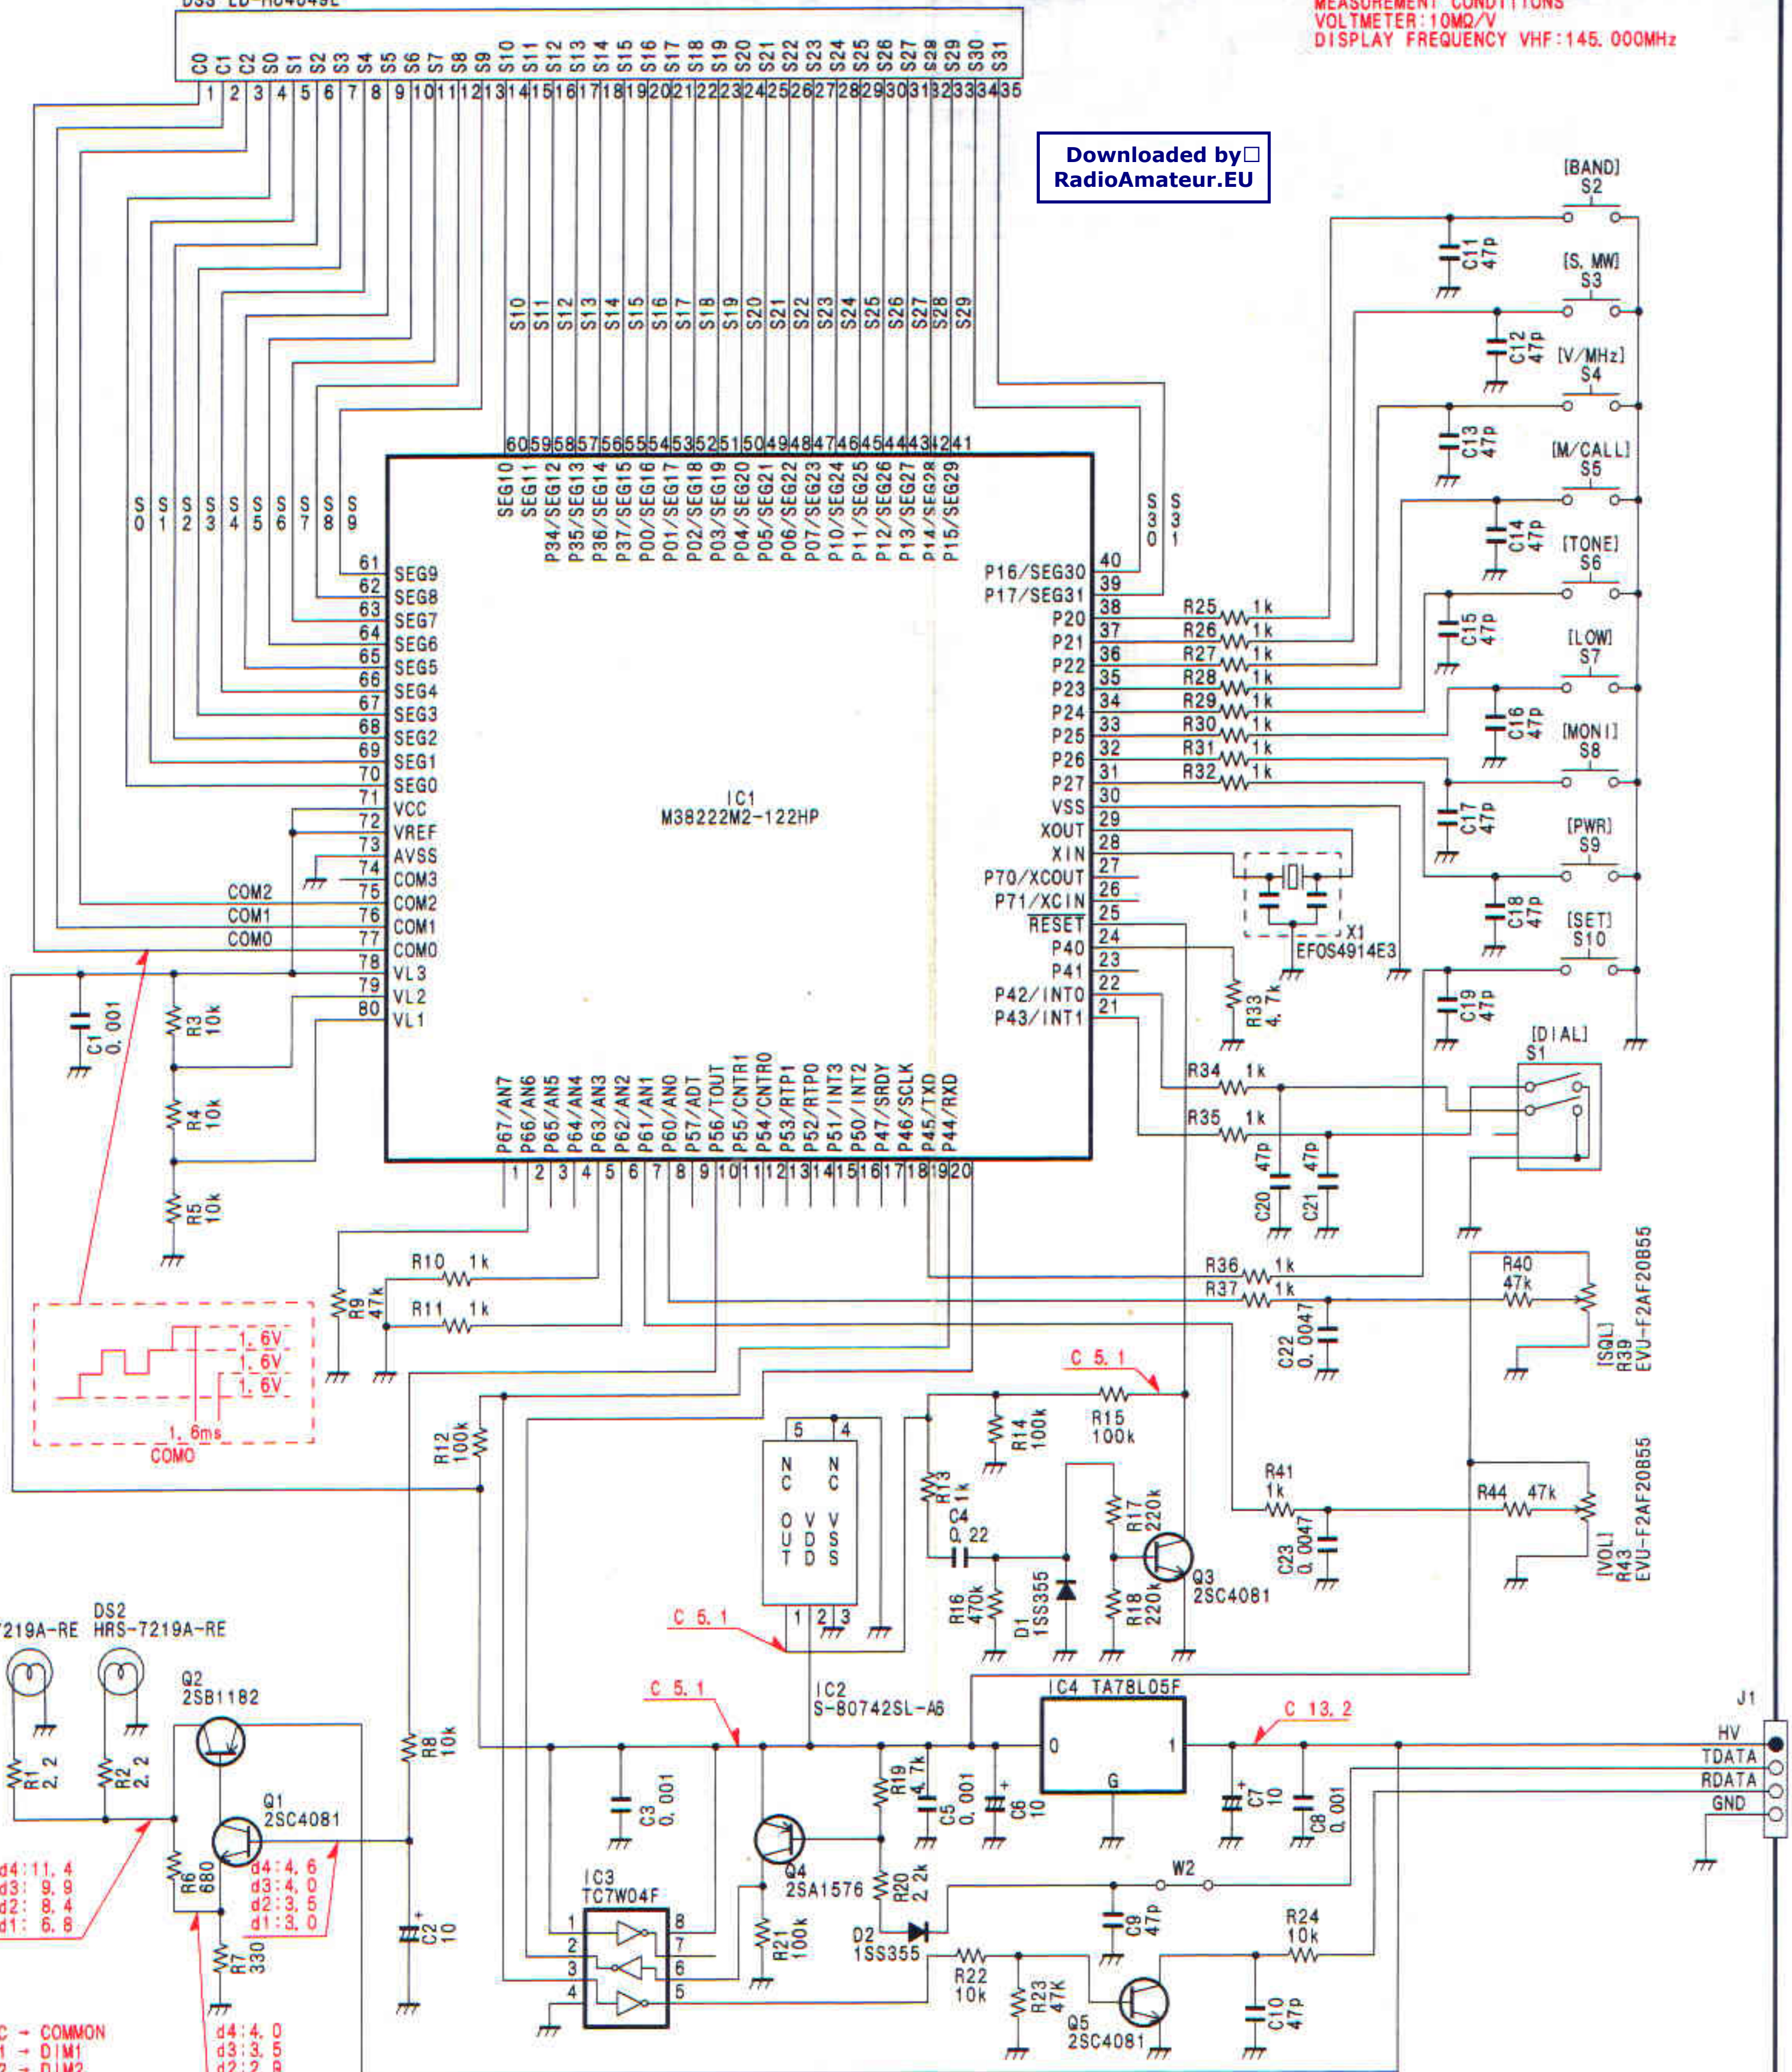

CONTROL UNIT

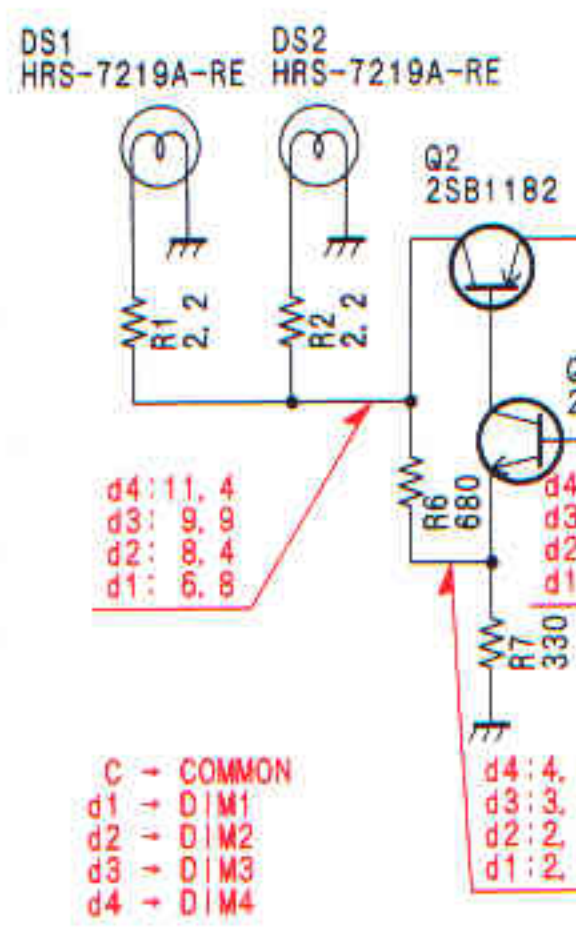

- C - COMMON
- d1 - DIM1
- d2 - DIM2
- d3 - DIM3
- d4 - DIM4